



The Comparison of Lumped and Distributed Models for Estimating Flood Hydrograph (Study Area: kabkian Basin)

Arash Asadi

Faculty Member of Islamic Azad University Dehdasht branch, Iran Tel: +98-917-743-0720

Received 30 September, 2013; Accepted 30 October, 2013 © The author(s) 2013. Published with open access at www.questjournal.org

ABSTRACT: Rainfall-runoff processes in Kabkian basin (846.5 km²) in Kohgiluyeh and Boyer-Ahmad, Iran was examined. At first, in this study, Kabkian basin was considered as lumped and then basin divided into a number of sub-basins where the hydrologic parameters may vary from one sub-basin to another. In such case, lumped models may be labeled as "semi-distributed." The hydrologic model HEC-HMS (Hydrologic Engineering Center, Hydrologic Modeling System), used in combination with the Geospatial Hydrologic Modeling Extension, HEC-GeoHMS. The SCS curve number method (Soil Conservation Service, 1972) was considered for the rainfall-runoff modelling and in both cases the model was carefully calibrated and verified in basin using historical observed data. The determination coefficients and coefficients of agreement for all the flood events were above 0.9, and the percent errors in peak flow and volume were all within the acceptable range. Then, a local sensitivity analysis was adopted for evaluating the event model. There are three parameters (curve number, initial abstraction and lag time) of the event model that were subject to the sensitivity analysis in the Kabkian basin. In both lumped and distributed model, the highest differences between the generated peak hydrographs and the baseline peak hydrograph was caused by curve number. The results indicated that semi-distributed model captured the peak runoff discharges and total runoff volume better than lumped model. However, overall, the performance of both models was quite reasonable.

Keywords: Semi-distributed model, Kabkian basin, HEC-HMS, Sensitivity analysis, Rainfall-runoff modelling, HEC-GeoHMS, SCS, Kohgiluyeh and Boyer-Ahmad.

I. INTRODUCTION

Currently available watershed models range from simple conceptual lumped models to comprehensive physically based distributed models. Conceptual lumped models use an integrated description of parameters representing an average value over the entire basin. A watershed can be divided into a number of sub-basins where the hydrologic parameters may vary from one sub-basin to another. In such case, lumped models may be labeled as "semi-distributed." They remain non-physically based, however, as they use synthetic methods of transforming rainfall to runoff. This study used the HEC-HMS Version 3.2. The HEC model is designed to simulate the surface runoff response of a basin to precipitation by representing the basin with interconnected hydrologic and hydraulic components. It is primarily applicable to flood simulations. In HEC-HMS, the basin model comprises three vital processes; the loss, the transform and the base flow. Each element in the model performs different functions of the precipitation-runoff process within a portion of the basin or basin known as a sub-basin. An element may depict a surface runoff, a stream channel, or a reservoir. Each of the elements is assigned a variable which defines the particular attribute of the element and mathematical relations that describe its physical processes. The result of the modeling process is the computation of stream flow hydrographs at the basin outlet. The design, construction and operation of many hydraulic projects require an adequate knowledge of the variation of the basin's runoff, and for most of these problems it would be ideal to know the exact magnitude and the actual time of occurrence of all stream flow events during the construction period and economic life of the project. If this information was available at the project planning and design stages, it would be possible to select from amongst all alternatives a design, construction program, and operational procedure that would produce a project output with an optimized objective function. Unfortunately, such ideal and precise information is never available because it is impossible to have advance knowledge of the project hydrology for water resources development projects; it is necessary to develop plans, designs, and management techniques using a hypothetical set of future hydrologic conditions. It is the determination of these future hydrologic conditions that has long occupied the attention of engineering hydrologists who have attempted to identify acceptable simplifications of complex hydrologic phenomena and to develop adequate models for the prediction

of the responses of basins to various natural and anthropogenic hydrologic and hydraulic phenomena. In view of these, a number of hydrologic models have been developed for flood forecasting and the study of rainfall-runoff processes (Yusop and Chan, 2007; Yener and orman,2008; Li and Jia, 2008; Stisen and Jensen,2008; Khakbaz and et al,2009; Salerno and Tartari, 2009; Amir and Emad,2010; Jang and Kim, 2010; James and Zhi,2010;).In another study, the hydrologic parameters were calibrated and verified in kabkian basin and delibajak subbasin (Asadi and porhemat,2012). In recent times, GIS (geographic information systems) has become an integral part of hydrologic studies because of the spatial character of the parameters and precipitation controlling hydrologic processes. GIS plays a major role in distributed hydrologic model parameterization. This is to overcome gross simplifications made through representation by lumping of parameters at the river basin scale. The extraction of hydrologic information, such as flow direction, flow accumulation, watershed boundaries, and stream networks, from a DEM (digital elevation model) is accomplished through GIS applications. This study combined GIS with HEC-HMS, and analyzed the model's suitability for the studied basins. The Kabkian basin are selected as the study areas in this research and basin parameters(curve number and initial abstraction) were calibrated using the rainfall-runoff data of the basin that are collected by 12 rainfall and one runoff stations for 2008-2011 period. The present study has two main objectives: (1) calibration ,verification and sensivity analysis of the HEC-HMS hydrologic model in Kabkian basin, in both cases, lumped and distributed, and (2) Model Performance Evaluation by statistical measures.

II. MATERIALS AND METHODS

The Study Area

The kabkian basin are located in the west of Yasooj City,kohgilouye and boyerahmad Province in Southwest iran. The basin is in between 30° 26' - 30° 54' northern latitudes and 51° 05' - 51° 37' eastern longitudes. kabkian basin has a total basin area of 846.5 km² with an elevation ranging from 1500 near the outlet to 3000m at the basin divide with an average channel slope of 0.014.Average annual precipitation is about 973 mm of which over 90% occurs between November to April in the form of frontal rainfall induced flood. It has a humid and cold climate, an average annual temperature of about 12 ºc. (Fig 1.)

Data used

In the kabkiab basin ,streamflow and precipitation have been monitored since 2000 by the kogilouye and boyerahmad Regional Water Authority. Precipitation data was collected by 12 raingauges located in the middle and lower parts of the basin. Stream flow data were collected at the outlet of the basin (botari hydrometric station) at one hour interval. meteorological data were acquired from the local climatological station. All the hydrologic model simulations are performed on an hourly time step basis.

Software used

Hec-GeoHMS 5.0

It is a geospatial hydrology toolkit for engineers with limited GIS experience[USACE-HEC, 2003]. It is an extension package used in ArcMap software. In this study, Hec-GeoHMS is used to derive river network of the basins and to delineate subbasins of the basins from the digital elevation model (DEM) of the basins. In the subbasins delineation process streamflow gages botari is used for Kabkian basin.

HEC-HMS 3.3

It is a hydrologic modeling software developed by US Army Corps of Engineers Hydrologic Engineering Center. It includes many of the well-known and well applicable hydrologic methods to be used to simulate rainfall-runoff processes in river basins. [USACE-HEC, 2006].

III. MODEL APPLICATION AND CALIBRATION

In this study, 5 flood events that occurred during the three-year period of 2009-2011 in the Kabkian Basin was used for model testing. HMS uses a project name as an identifier for a hydrologic model. An HMS project must have the following components before it can be run: a basin model, a meteorological model, and control specifications. The basin model and basin features were created in the form of a background map file imported to HMS from the data derived through HEC-GeoHMS for model simulation (Fig. 2 and Fig. 3). The observed precipitation and discharge data were used to create the meteorological model using the user gauge weighting method and, subsequently, the control specification model was created. The control specifications determine the time pattern for the simulation; its features are: a starting date and time, an ending date and time, and a computation time step. To run the system, the basin model, the meteorological model, and the control specifications were combined. The observed historical data of twelve raingauge stations representing each sub-

basin and one stream gauge station in the Kabkian Basin, were used for model calibration and verification. An hourly time step was used for the simulation based on the time interval of the available observed data. The SCS curve number method was employed to model infiltration loss. The SCS (Soil Conservation Service) unit hydrograph method was used to model the transformation of precipitation excess into direct surface runoff. The constant monthly method was employed to model baseflow. The Muskingum routing model was used to model the reaches.

Each method in HEC-HMS has parameters and the values of these parameters should be entered as input to the model to obtain the simulated runoff hydrographs. Some of the parameters may be estimated by observation and measurements of stream and basin characteristics, but some of them cannot be estimated. When the required parameters can not be estimated accurately, the model parameters are calibrated, i.e. in the presence of rainfall and runoff data the optimum parameters are found as a result of a systematic search process that yield the best fit between the observed runoff and the computed runoff. This systematic search process is called as optimization. Optimization begins from initial parameter estimates and adjusts them so that the simulated results match the observed streamflow as closely as possible.

The trial and error method, in which the hydrologist makes a subjective adjustment of parameter values in between simulations in order to arrive at the minimum values of parameters that give the best fit between the observed and simulated hydrograph, was employed to calibrate the model. Although the model was calibrated manually, the HEC-HMS built-in automatic optimization procedure was used to authenticate the acceptability and suitability of the parameter values and their ranges as applicable to their uses in HEC-HMS. The choice of the objective function depends upon the need. The SCS Curve Number method, which is used to handle the infiltration loss in the subbasins, has three parameters such as: curve number, initial abstraction and percent impervious area in the basin. Percent impervious area is taken as "0 %", since no urban settlements are present inside the subbasin. Therefore, the remaining two parameters (curve number, initial abstraction) of SCS curve number method were calibrated. The SCS unit hydrograph method, which is used to model the transformation of precipitation excess into direct surface runoff, has lag time parameter. This parameter was calibrated, as well.

IV. MODEL PERFORMANCE EVALUATION METHODS:

The criteria used to evaluate the performance of the models are the overall agreement between predicted and measured runoff discharges, and the models' ability to predict time and magnitude of hydrograph peaks, and runoff volume. The following statistical measures were used to quantify the performance accuracy of both models during each simulation periods, and combined over all periods:

- Percent error in peak flow (*PEPF*). The *PEPF* measure only considers the magnitude of computed peak flow and does not account for total volume or timing of the peak:

$$PEPF = 100 \left| \frac{Q_o(\text{peak}) - Q_s(\text{peak})}{Q_o(\text{peak})} \right| \quad (1)$$

where $Q_o(Q_s)$ is the the observed (simulated) flow.

- Percent error in volume (*PEV*). The *PEV* function only considers the computed volume and does not account for the magnitude or timing of the peak flow:

$$PEV = 100 \left| \frac{V_o - V_s}{V_o} \right| \quad (2)$$

where $V_o(V_s)$ is the volume of the observed (simulated) hydrograph.

- Coefficient of correlation (*R*). The lag-0 cross correlation coefficient was calculated as:

$$R = \frac{\sum_{t=1}^N (O_t - \bar{O}) \times (S_t - \bar{S})}{\sqrt{[\sum_{t=1}^N (O_t - \bar{O})^2 \times \sum_{t=1}^N (S_t - \bar{S})^2]}} \quad (3)$$

Where $O_t(S_t)$ is the observed (simulated) flow at time t , and $\bar{O}(\bar{S})$ is the average observed (simulated) flow during the calibration period.

- The relative root mean squared error, *RRMSE*, were calculated as:

$$RRMSE = 100 \times \sqrt{\frac{1}{N} \sum_{t=1}^N \left(\frac{S_t - O_t}{O_t} \right)^2} \quad (4)$$

where N is the number of streamflow ordinates and the meaning of the remaining symbols is the same as in Equation (3).

V. SENSIVITY ANALYSIS

Sensitivity analysis is a method to determine which parameters of the model have the greatest impact on the model results. It ranks model parameters based on their contribution to overall error in model predictions. Sensitivity analysis can be local and global (Haan, 2002). In this study, a local sensitivity analysis was adopted for evaluating the event model. There are three parameters (curve number, initial abstraction and Lag Time) of the event model that were subject to the sensitivity analysis. The final set of the parameters of the calibrated model was deemed as baseline/nominal parameter set. Then, the model was run repeatedly with the starting baseline value for each parameter multiplied, in turn, by 0.7, 0.8, 0.9, 1.1, 1.2 and 1.3, while keeping all other parameters constant at their nominal starting values. The hydrographs resulting from the scenarios of adjusted model parameters were then compared with the baseline model hydrograph.

VI. RESULTS AND DISCUSSION

As described in the introduction, each component of HEC-HMS models an aspect of the precipitation-runoff process within a portion of the basin, commonly referred to as a sub-basin. Representation of a component requires a set of parameters that specify the particular characteristics of the component and mathematical relations that describe the physical processes. Tables 1 and 2 show the calibrated parameter values in the Lumped and Semi-distributed kabkian basin, respectively. Apart from the sub-areas, which are fixed, parameters were calibrated simultaneously through adjustment of their values until a good agreement between the observed and simulated hydrographs was achieved.

The calibration and validation graphs of basin, in both cases, are shown below. Figs. 4 through 7 show good agreement between observed and simulated graphs. Also, Tables 3 and 4 show observed and simulated values for both calibration and validation basin, in both cases. Table 5 show a summary of the models performance. It can be seen in the above graphs that the simulated and observed peak discharges occurred on the same day, and their maximum time difference was one hour, which is acceptable for flood forecasting. Also, Figures 8 and 9 summarize the absolute differences obtained from the -30% scenarios for each parameter of the event model. In both cases, The highest differences were generated by the change in Curve Number parameter, CN.

VII. CONCLUSIONS

As shown in the results above, the model predicted peak discharge accurately based on the available historical flood data. Both the flood volume and timing were fairly accurate. This shows that HEC-HMS is suitable for the studied basin. From the results, we can conclude that the complexity of the model structure does not determine its suitability and efficiency. Though the structure of HEC-HMS is simple, it is a powerful tool for flood forecasting. A further application of HEC-HMS should be encouraged to confirm its suitability for the Iran basins. The results indicated that Semi-distributed model captured the peak runoff discharges and total runoff volume better than Lumped model. However, overall, the performance of both models was quite reasonable. As well, three parameters (curve number, initial abstraction and lag time) of the event model that were subject to the sensitivity analysis. In both cases, lumped and semi-distributed basin, The highest differences were generated by the change in Curve Number parameter, CN. Also, the optimized hydrologic parameters, curve number and initial abstraction were compared in both cases. In the lumped case, curve number, initial abstraction and Lag Time were 62, 34mm, and 347 min, respectively. In the semi-distributed case, curve number and initial abstraction, ranges from 61 to 66, and 33 mm to 40 mm, respectively. This variation is due to differences in basin slope, geologic formations, vegetation cover and land use in subbasins.

REFERENCES

- [1]. Amir, A, Emad. H, 2010, Application of a Conceptual Hydrologic Model in Teaching Hydrologic Processes, Int. J. Engng Ed. Vol. 26, No. 4, pp. 1–11, 2010
- [2]. Asadi, A, Porhemat, J, 2012, Calibration, verification and sensitivity analysis of the HEC-HMS hydrologic model (study area: Kabkian basin and Delibajak subbasin), Iran, Journal of ECOLOGY, ENVIRONMENT AND CONSERVATION, 18 (4), 805-812.
- [3]. James, O, Zhi-j. L, 2010, Application of HEC-HMS for flood forecasting in Misai and Wan'an catchments in China, Water Science and Engineering, 2010, 3(1): 14-22
- [4]. Jang, T. I. and Kim, H. K., 2010, Estimation of storm hydrographs in a mixed – land use watershed using a modified TR-20 model.

- [5]. Khakbaz, B., et al,2009. From lumped to distributed via semi-distributed: Calibration strategies for semi-distributed hydrologic models. J. Hydrol. doi:10.1016
- [6]. Li, S. Y., Qi, R. Z., and Jia, W. W. 2008. Calibration of the conceptual rainfall-runoff model's parameters. Proceeding of 16th IAHR-APD Congress and 3rd Symposium of IAHR-ISHS, 55-59. Beijing: Tsinghua University Press.
- [7]. Parajka J,Blosch G,2010,The value of MODIS snow cover data in Validating and calibrating conceptual hydrologic model, Journal of Hydrology, vol 358,240-258.
- [8]. Salerno, F., and Tartari, G., 2009, "A coupled approach of surface hydrological modelling and Wavelet Analysis for understanding the baseflow components of river discharge in karst environments", Journal of Hydrology, Volume 376, Issues 1-2, Pages 295-306.
- [9]. Stisen,S,Jensen.K,2008, A Remote Sensing driven distributed hydrological model of the Senegal river basin,journal of hydrology 354:131-148.
- [10]. U. S. Army Corps of Engineers (USACE), 2009b, Hydrologic Modeling System: Technical Reference Manual, Davis, CA: U.S. Army Corps of Engineers, Hydrologic Engineering Center.
- [11]. U. S. Army Corps of Engineers (USACE), 2000a,Geospatial modeling extension. HEC-GeoHMS, User's Manual, Davis, CA: U.S. Army Corps of Engineers, Hydrologic Engineering Center.
- [12]. Yener, M.K. orman, A.Ü.2008. Modeling Studies With Hec-Hms and Runoff Scenariosin Yuvacik Basin, Turkiye. Department of Civil Engineering, Middle East Technical University, 06531 Ankara/Türkiye.
- [13]. Z. Yusop, C.H. Chan and A, 2007,Katimon,Runoff characteristics and application of HEC-HMS for modelling stormflow hydrograph in an oil palm catchment, Water Science & Technology Vol 56 No 8 pp 41-48

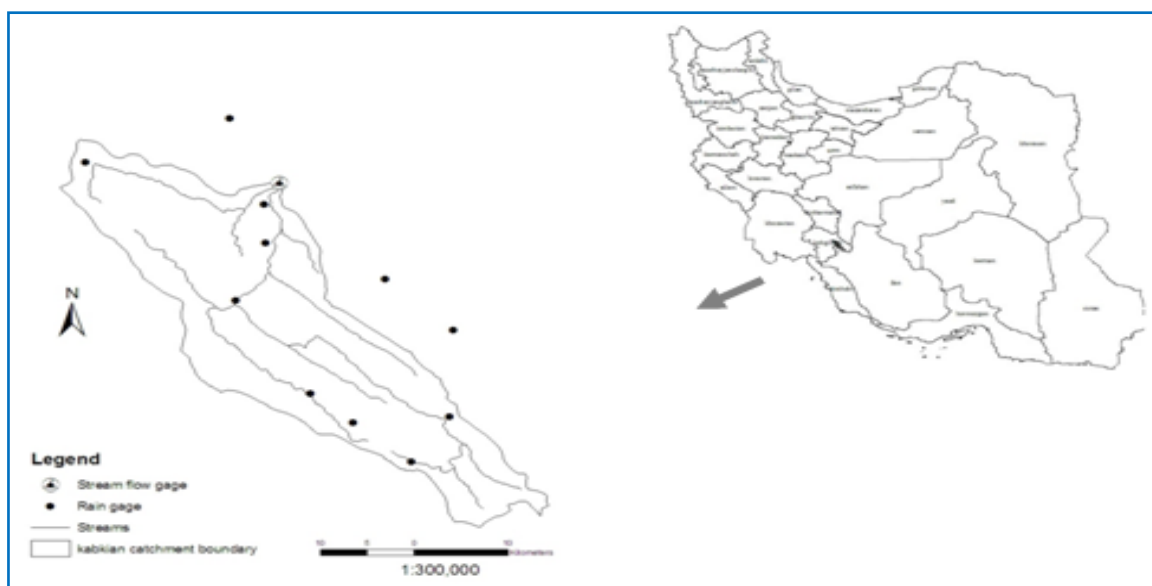


Fig 1. Regional map of Iran, location of study basin and monitoring

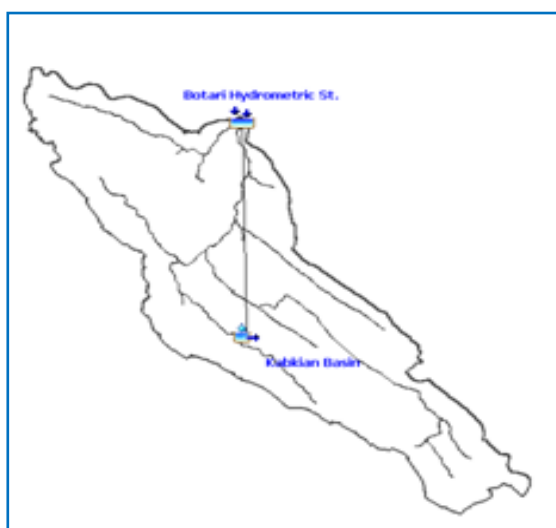


Fig 2. Processed results for Lumped Kabkian Basin imported to HEC- HMS for simulation.



Fig 3. Processed results for Semi- Distributed Basin imported to HEC- HMS for simulation

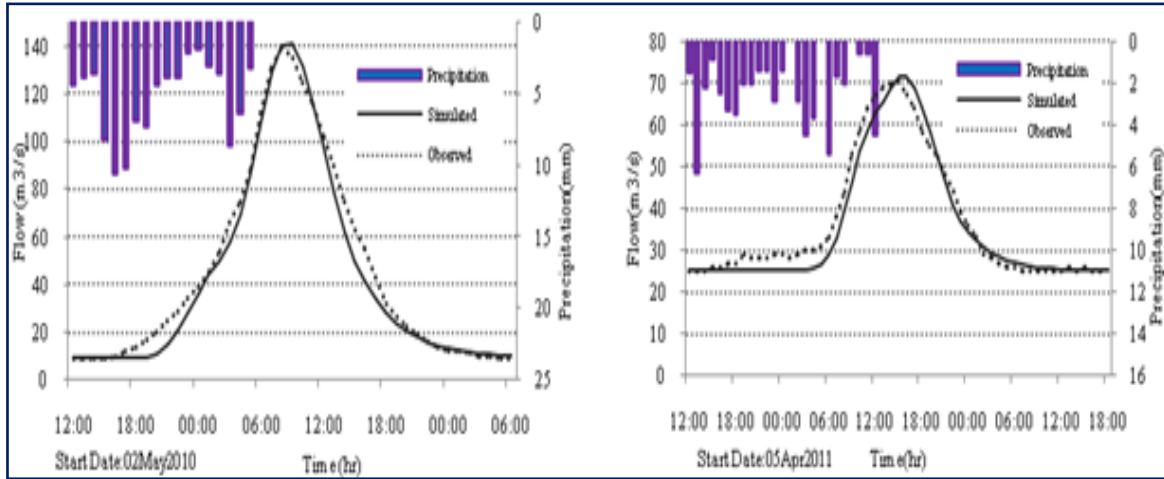


Fig 4. Observed vs. simulated flow in May 2010 for Lumped Kabkian basin calibration.

Fig 5. Observed vs. simulated flow in Apr 2011 for Lumped Kabkian basin validation.

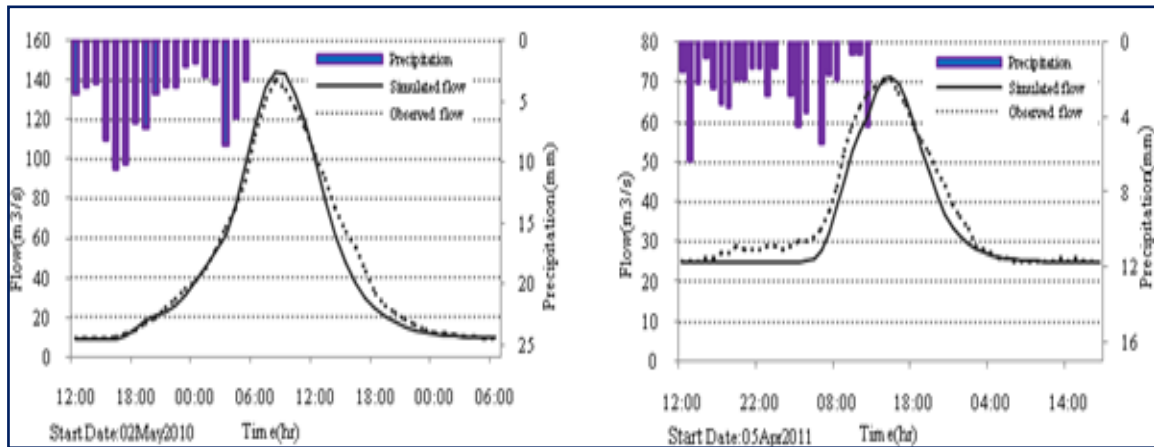


Fig 6. Observed vs. simulated flow in May 2010 for Semi-distributed Kabkian basin calibration

Fig 7. Observed vs. simulated flow in Apr 2011 for Semi-distributed Kabkian basin validation.

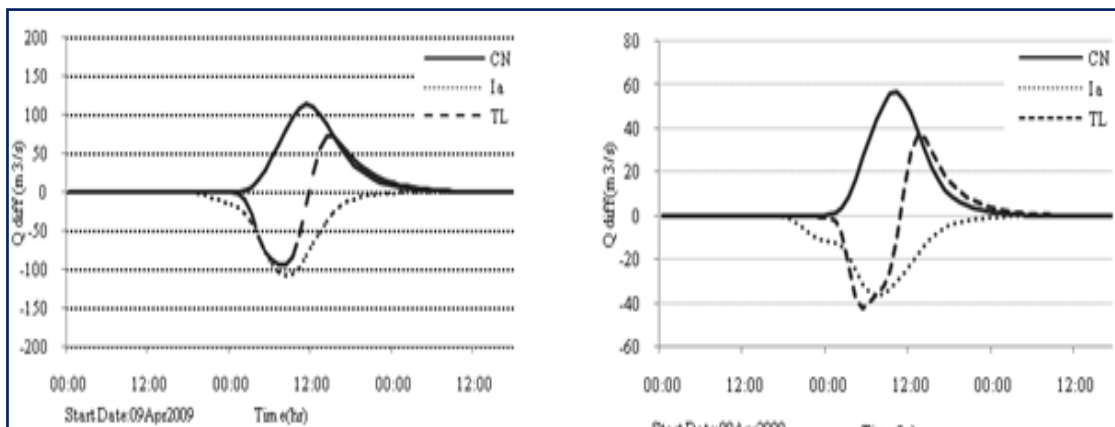


Fig 8. Sensitivity analysis of the parameters in the kabkian Lumped basin.

Fig 9. Sensitivity analysis of the parameters in the dashroom sub-basin.

Table 1. values of calibrated parameters in Lumped Kabkian Basin				
Sub-basin	Area(km ²)	Curve Number (CN)	Initial Abstraction (mm)	SCS Lag (min)
Kabkian	846.5	62	34	347

Table 2. values of calibrated parameters in Semi-Distributed Kabkian Basin

Sub-basin	Area(km ²)	Curve Number (CN)	Initial Abstraction (mm)	SCS Lag (min)	Muskingum coefficient	
					X	K(hr)
Sarchenar	171.4	62.6	35.2	279.2	-	-
Chitab	66.0	61.5	54.2	80.6	.2	1.25
Narmab	82.1	61.5	36.4	114.6	-	-
Jouzar	25.3	61.5	22.8	26.2	.2	.48
Pireshkaft	8.4	67.0	21.6	20.5	.2	.53
Cheshmekhersi	93.4	61.7	35.2	150.0	-	-
Dashtroom	247.3	61.2	39.0	294.9	-	-
Sepidar	152.6	60.8	41.1	293.5	-	-

Table 3. Calibration and validation results for Lumped Kabkian Basin

Period	Date	Simulated			Observed		
		$Q_s(m^3/s)$	$V_s(1000m^3)$	Time to peak	$Q_o(m^3/s)$	$V_o(1000m^3)$	Time to peak
Calibration	02May2010	144.2	6779.3	03May2010,08:00	140	7030.8	03May2010,08:00
	09Mar2011	696	14062.7	13Mar2011,01:00	684	154809	13Mar2011,02:00
	09Apr2009	338.4	29099.5	10Apr2009,11:00	338	29759.4	10Apr2009,11:00
Validation	05Apr2011	71.4	6659.5	06Apr2011,15:00	70.5	7116.6	06Apr2011,15:00
	28Nov2009	297.4	16861.7	29Nov2009,14:00	288	19166.4	29Nov2009,15:00

Table 4. Calibration and validation results for Semi-Distributed Kabkian Basin

Period	Date	Simulated			Observed		
		$Q_s(m^3/s)$	$V_s(1000m^3)$	Time to peak	$Q_o(m^3/s)$	$V_o(1000m^3)$	Time to peak
Calibration	02May2010	140.8	6549.2	03May2010,09:00	140	7030.8	03May2010,08:00
	09Mar2011	682.8	146450.2	13Mar2011,03:00	684	154809	13Mar2011,02:00
	09Apr2009	331.2	29271	10Apr2009,11:00	338	29759.4	10Apr2009,11:00
Validation	05Apr2011	71.6	6881.3	06Apr2011,16:00	70.5	7116.6	06Apr2011,15:00
	28Nov2009	291.6	17582.6	29Nov2009,15:00	288	19166.4	29Nov2009,15:00

Table 5. Model performance evaluation for selected storm events

Basin	Period	Date	Evaluation criteria			
			PEPF (%)	PEV (%)	R(-)	Rrmse (%)
Kabkian(Semi-Distributed)	Calibration	02May2010	.6	6.8	.99	16.7
		09Mar2011	.17	5.4	.99	13.5
		09Apr2009	2.1	1.6	.99	4.2
	Validation	05Apr2011	1.6	3.3	.99	7.9
		28Nov2009	1.25	8.2	.99	13.3
Kabkian (Lumped)	Calibration	02May2010	.6	6.8	.99	16.7
		09Mar2011	.17	5.4	.99	13.5
		09Apr2009	.1	2.2	.99	3.7
	Validation	05Apr2011	1.6	3.3	.99	7.9
		28Nov2009	3.6	12	.97	21.9